


FEATURES:

- Anti-Static Devices For Ball- Stem- Body
- Blow-out Proof Stem
- Pressure Balance Hole In Ball Slot
- Built In ISO 5211 Bracket Mount For Easy Automation

STANDARDS:

- Design: ASME B16.34
- Wall Thickness: ASME B16.34
- Fire Safe: API 607 ISO 10497
- Face to Face: ASME B 16.10
- End Flange: ASME B16.5
- Inspection & Testing: API 598

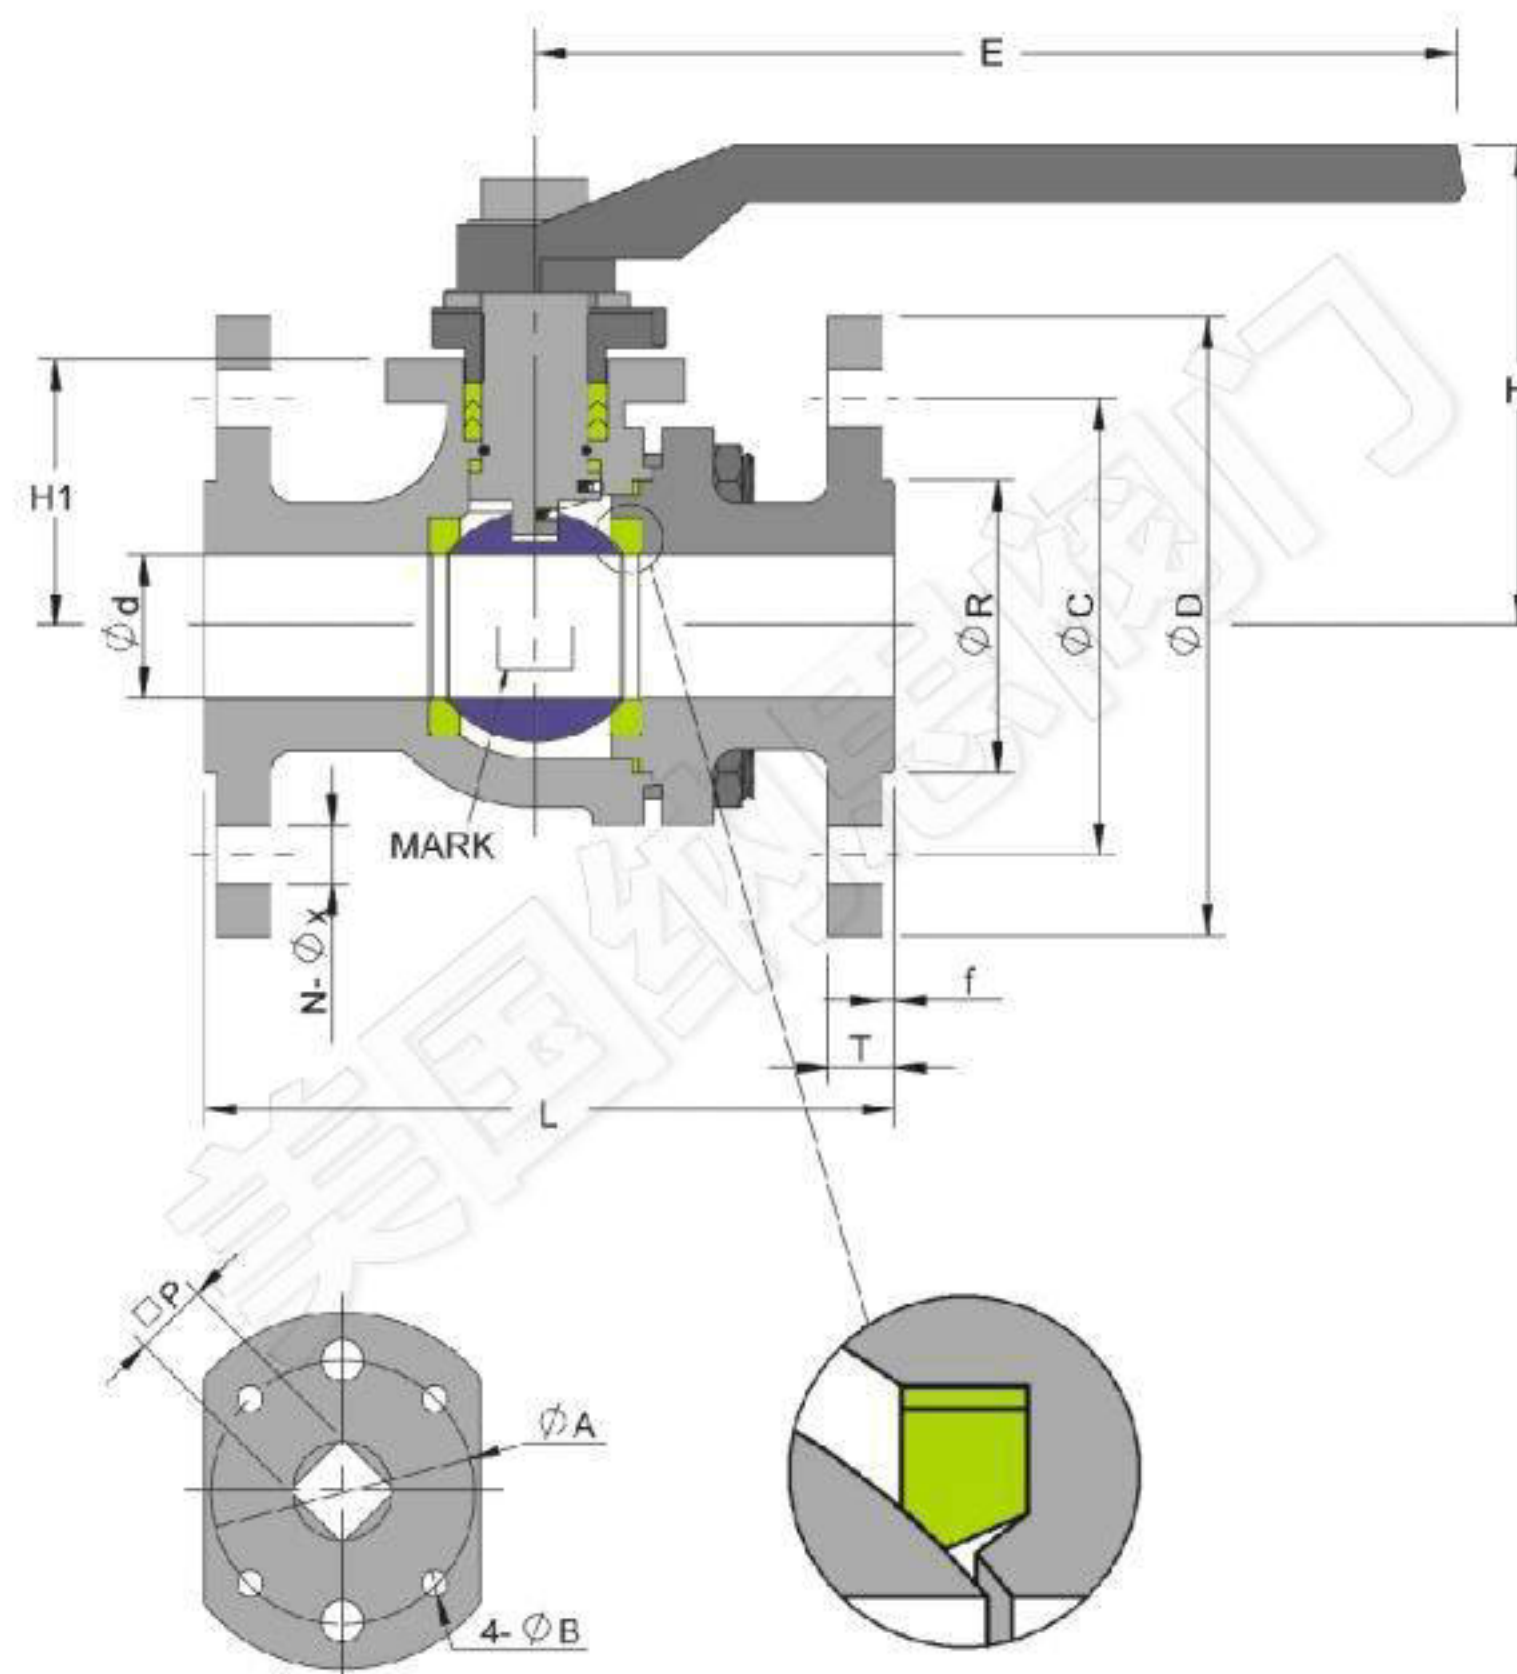

ISO-5211 Mounting Pad

Fire Safe Design

Unit:mm ■ ASME 150LBS

Size	(LBS)	L	Ød	ØR	ØC	ØD	H	H1	E	f	T	N	ØX	□P	ØA	ØB	ISO-5211
1/2"	150	108	15	34.9	60.3	90	77.5	34	150	2	11.2	4	16	11	42	4	F4
3/4"	150	117	20	42.9	69.9	100	79	35.5	150	2	11.2	4	16	11	42	4	F4
1"	150	127	25	50.8	79.4	110	88	45	150	2	12	4	16	11	42	4	F4
1-1/4"	150	140	32	63.5	88.9	115	100	50	170	2	12.7	4	16	14	50	5	F5
1-1/2"	150	165	38	73	98.4	125	122	60	230	2	14.3	4	16	17	70	6.5	F7
2"	150	178	50	92.1	120.7	150	130	68	230	2	15.9	4	19	17	70	6.5	F7
2-1/2"	150	190	65	104.8	139.7	180	148	86	230	2	17.5	4	19	17	70	6.5	F7
3"	150	203	78	127	152.4	190	167	96	305	2	19.1	4	19	22	102	8.5	F10
4"	150	229	100	157.2	190.5	230	188	117	305	2	23.9	8	19	22	102	8.5	F10
5"	150	356	125	185.7	215.9	255	246	141	500	2	23.9	8	22	22	125	10.5	F12
6"	150	394	150	215.9	241.3	280	288	172	645	2	25.4	8	22	27	125	10.5	F12
8"	150	457	200	269.9	298.5	345	329	213	845	2	28.6	8	22	27	125	10.5	F12
10"	150	533	250	323.8	362	406	396	255	1335	2	30.2	12	25	36	140	14	F14