


### FEATURES:

- Anti-Static Devices For Ball- Stem- Body
- Blow-out Proof Stem
- Pressure Balance Hole In Ball Slot
- Built In ISO 5211 Direct Mounting Pad For Easy Automation

### STANDARDS:

- Design: BS 5351
- Wall Thickness: ASME B16.34
- Fire Safe: API 607 ISO 10497
- Face to Face: ASME B 16.10
- End Flange: BS 4504
- Inspection & Testing: BS 5146

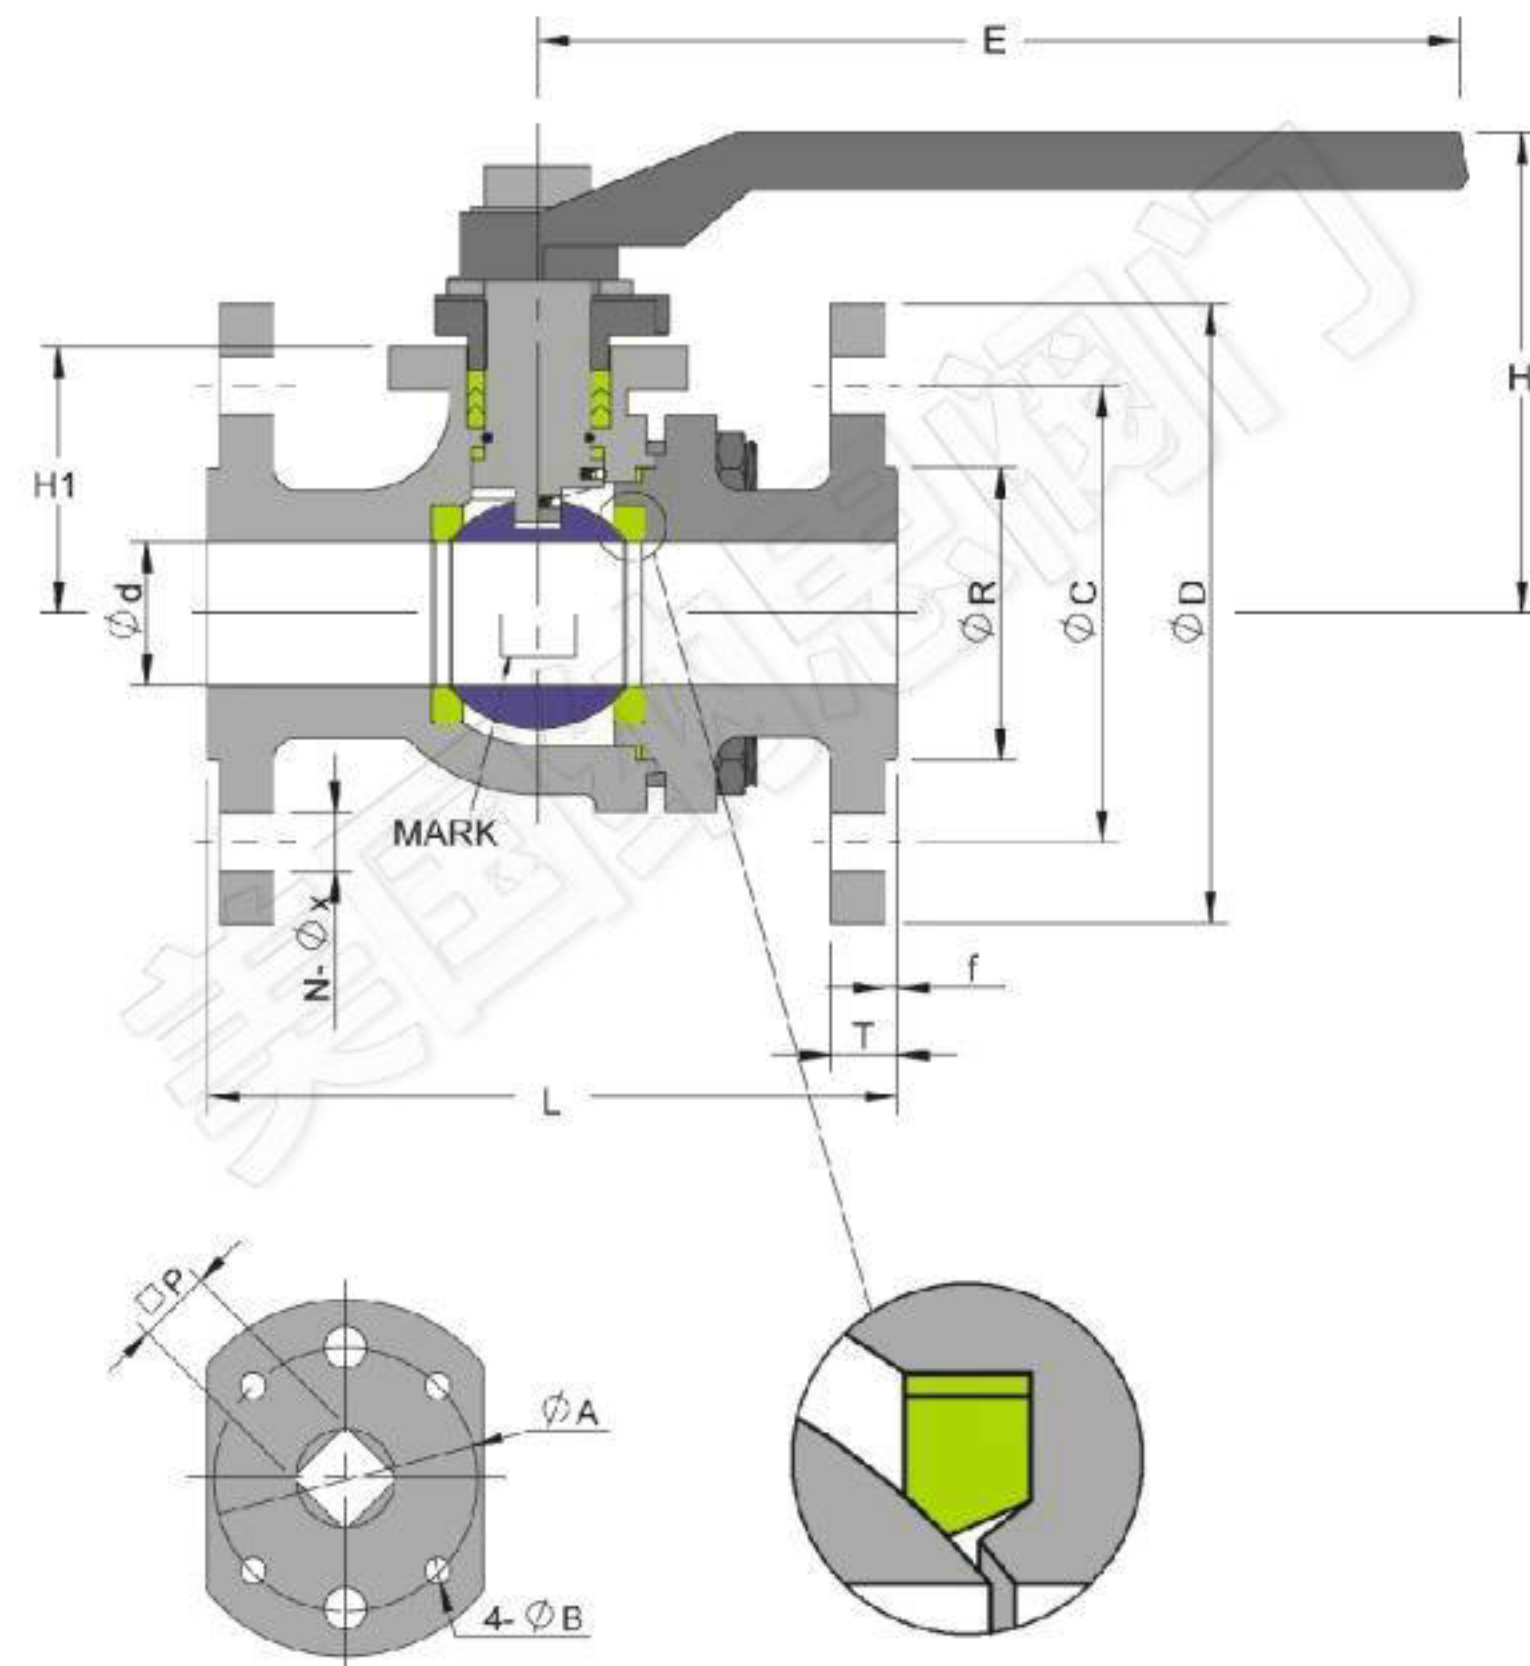

ISO-5211 Mounting Pad

Fire Safe Design

Unit:mm ■ BS 150LBS

Size	Pressure (LBS)	L	Ød	ØR	ØC	ØD	H	H1	E	f	T	N	ØX	□P	ØA	ØB	ISO-5211
1/2"	150	108	15	45	65	95	77.5	34	150	2	14	4	14	11	42	4	F4
3/4"	150	117	20	58	75	105	79	35.5	150	2	16	4	14	11	42	4	F4
1"	150	127	25	68	85	115	88	45	150	2	16	4	14	11	42	4	F4
1-1/4"	150	140	32	78	100	140	100	50	170	2	16	4	18	14	50	5	F5
1-1/2"	150	165	38	88	110	150	122	60	230	3	16	4	18	17	70	6.5	F7
2"	150	178	50	102	125	165	130	68	230	3	18	4	18	17	70	6.5	F7
2-1/2"	150	190	65	122	145	185	148	86	230	3	18	4	18	17	70	6.5	F7
3"	150	203	78	138	160	200	167	96	305	3	20	8	18	22	102	8.5	F10
4"	150	229	100	158	180	220	188	117	305	3	20	8	18	22	102	8.5	F10
5"	150	356	125	188	210	250	246	141	500	3	22	8	18	22	125	10.5	F12
6"	150	394	150	212	240	285	288	172	645	3	22	8	22	27	125	10.5	F12
8"	150	457	200	268	295	340	329	213	845	3	24	12	22	27	125	10.5	F12
10"	150	533	250	320	355	405	396	255	1335	3	26	12	26	36	140	14	F14